

# Hooklift Containers

## MK Standard version without special features



ISO 9001:2008

### Area of use:

Intended for the storage, segregation and transportation of wastes and recyclable materials, build garbages, muddy soil, and other materials according to customer wish.

### Technical specification:



- the capacity of the container is 10 - 46 m<sup>3</sup>,
- frame according to SS, DIN and other standards,
- hook lift loading system,
- thickness of steel sheets bottom: 4mm / side wall: 3mm,
- frame span: 1250mm,
- double door with a door locking and security blocking fitted on the side of the container.

### Special Options:

- single door fitted with a security locking on the side of the container, also fitted with a rubber seal,
- top hinged rear door mounted on an extended section or at level with the base of the container,
- door built on the side of the container,
- ramp (in case the container is used for transportation of machines),
- roller cover,
- permanent roof,
- sliding roof slideable by hand,
- lifting roof lifted by a lifting break or a hydraulic pump.



▲ MK 46 LP (LP - Logo plate version with a logo on the side wall)

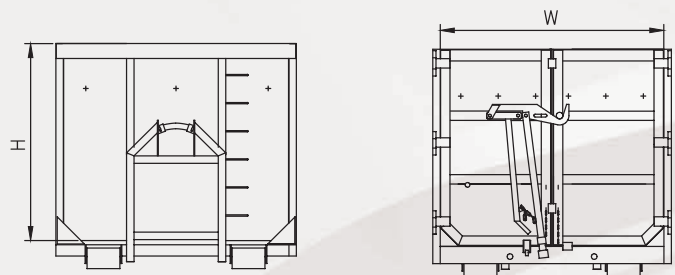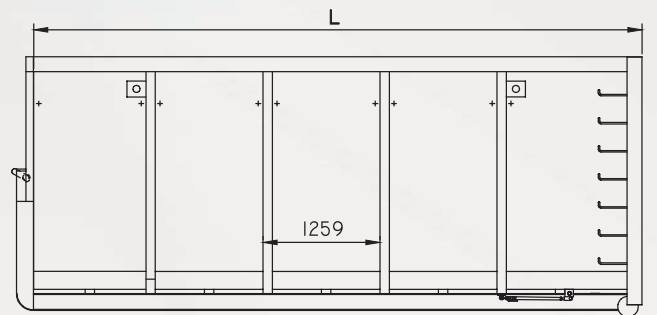

Type AMG	Capacity	Dimensions L W H [mm]	Steel thickness	Frame span
<b>MK 10</b>	10	6000x2380x750	3/4	1250
<b>MK 12</b>	12	6000x2380x850	3/4	1250
<b>MK 15</b>	15	6000x2380x1050	3/4	1250
<b>MK 20</b>	20	6000x2380x1400	3/4	1250
<b>MK 22</b>	22	6000x2380x1570	3/4	1250
<b>MK 25</b>	25	6000x2380x1750	3/4	1250
<b>MK 30</b>	30	6000x2380x2100	3/4	1250
<b>MK 35</b>	35	6000x2380x2400	3/4	1250
<b>MK 38</b>	38	6500x2380x2400	3/4	1250
<b>MK 41</b>	41	7000x2380x2400	3/4	1250
<b>MK 46</b>	46	7500x2380x2400	3/4	1250

Przedsiębiorstwo Produkcyjno Handlowe AMG Sp. z o.o.

ul. Słupska 18; 84-300 Lębork; Poland

Tel. +48 59 862 32 77, Tel. +48 59 862 87 80, Fax. +48 59 862 23 15

e-mail: office@amg.pl; web: www.amg.pl