

Hooklift Containers MK

- M: Medium version



ISO 9001:2008

Area of use:

Intended for the storage, segregation and transportation of wastes and recyclable materials, build garbages, muddy soil, and other materials according to customer wish.

Technical specification:




- the capacity of the container is 10 - 46 m³,
- frame according to SS, DIN and other standards,
- hook Lift loading system,
- thickness of steel sheets bottom: 4mm / side walls: 3mm,
- frame span: 750mm,
- double door with a door locking and security locking fitted on the side of the container.

Special Options:

- single door fitted with a security locking on the side of the container (also fitted with a rubber seal),
- top hinged rear door mounted on an extended section or at level with the base of the container,
- door built on the side of the container,
- ramp (in case the container is used for transportation of machines),
- roller cover,
- permanent roof,
- sliding roof slideable by hand,
- lifting roof lifted by a lifting break or a hydraulic pump.



▲ MK 35MMH (MH - the roof is lifted by a hydraulic pump)

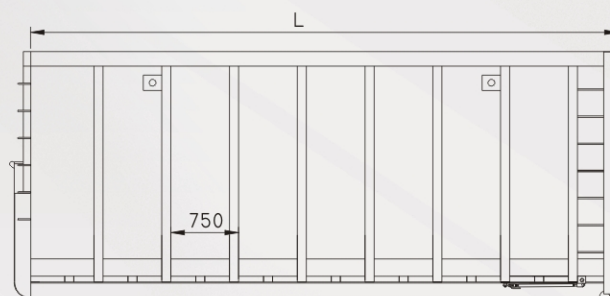

Type AMG	Capacity	Dimensions L W H [mm]	Steel thickness	Frame spam
MK 10M	10	6000x2380x750	3/4	750
MK 12M	12	6000x2380x850	3/4	750
MK 15M	15	6000x2380x1050	3/4	750
MK 20M	20	6000x2380x1400	3/4	750
MK 22M	22	6000x2380x1570	3/4	750
MK 25M	25	6000x2380x1750	3/4	750
MK 30M	30	6000x2380x2100	3/4	750
MK 35M	35	6000x2380x2400	3/4	750
MK 38M	38	6500x2380x2400	3/4	750
MK 41M	41	7000x2380x2400	3/4	750
MK 46M	46	7500x2380x2400	3/4	750

Przedsiębiorstwo Produkcyjno Handlowe AMG Sp. z o.o.

ul. Słupska 18; 84-300 Łęborg; Poland

Tel. +48 59 862 32 77, Tel. +48 59 862 87 80, Fax. +48 59 862 23 15

e-mail: office@amg.pl; web: www.amg.pl